

Scan the QR code for more product information



Cremax Europe GmbH . Weidenweg 21H 47059 Duisburg, Germany Email: support@icydock.com



Copyright © ICY DOCK International, All Rights Reserved, 6502311 VER 2.0



Package Contents • Packungsinhalt • Contenu • Contenido del paquete ● 包装について ● 包裝説明 ● 包装说明









14 × M3\*4 Screw for 2.5" HDD/SSD


× 14

(2 × Screw for Spare Parts) Note : Please use the included screws to secure the drive(s)


10 × M3\*2.5 Pan Head Screw for Device

👚 × 10

Device Information • Geräteinformationen • Informations dispositif ● Información del dispositivo ● 本体説明 ● 機體說明 ● 机体说明



- 2. LED Indicator (Device Power : Solid Blue / Drive Access : Flashing Blue )

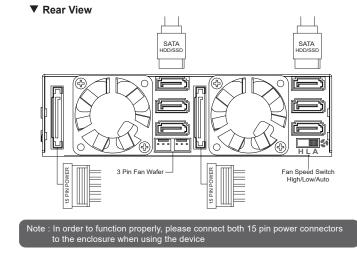

Fan Speed Switch Setting

	Hign [	100%
	Low Low	60%
	Auto (Default)	The fan will start at Low setting and increase its speed depending on the HDD temperature. If the HDD exceeded over 40°C (Room temp 25°C), the fan will increase its speed to maximum.
	sets the fan at its	ntrol has three settings: High, Low and Auto settings. The High setting maximum output and in Low setting the fan is at 60% of its maximum de, the fan speed will adjust accordingly to the temperature of the device

2.5" HDD/SSD Installation ● Installation einer 2.5" HDD/SSD



3-1

3-7

2.5" HDD/SSD取付手順2.5吋硬碟安裝步驟2.5寸硬盘安装步骤

Installation du disque dur/SSD 2.5"

Push button to eject the drive tray

3-4

3-6

Instalación de unidad de disco duro o unidad de estado sólido de 2.5"






3-5 Press down the front side of the drive to align with the tray

fro extra drive stability.







The ExpressTray supports tool-less drive installation. The patented mechanical design inside the enclosure secures the drive once the ExpressTray been inserted into the enclosure. Please do not flip the ExpressTray when there is a hard drive or solid state drive placed on it.

