

**MB111VP-B**



Scan the QR code for more product information

Copyright © ICY DOCK International. All Rights Reserved. 650306 VER 1.0



Cremax Europe GmbH  
Email: support@icydock.com  
Weidenweg 21H, 47059 Duisburg, Germany




Beyond Technologies UK Ltd  
Email: info@beyondtech.co.uk  
Unit B6, Halesfield 11, Telford, Shropshire, TF7 4PH, U.K.

**1**

Package Contents • Packungsinhalt • Contenu • Contenido del paquete  
• 包装について • 包装説明 • 包装说明



Device



User Manual



1 x #6-32\*6 Screw for Device




4 x M3\*4 Flat Head Screw for 2.5" SSD  
(2 x Screw for Spare Parts)

**Note:** Please use the included screws to secure the device & drive

**2**


Device Information • Geräteinformationen • Informations dispositif  
• Información del dispositivo • 本体説明 • 機體説明 • 机体说明

▼ Front View

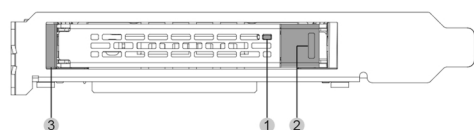

- 1 LED Indicator (Device Power : Solid Green ; Drive Access : Flashing Green)
- 2 Drive Tray Ejection Button
- 3 Silver Anti-scratch Shield

▼ Top View

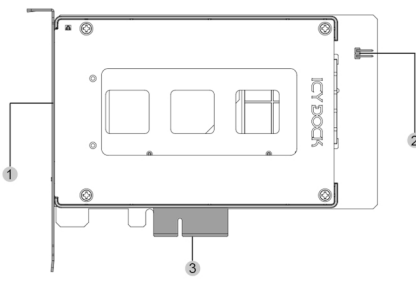


- 1 Full Height I/O Faceplate
- 2 (Optional) 2-Pin Header for Drive Activity LED
- 3 PCIe x4 Golden Finger (Compatible with PCIe x4 / x8 / x16 Slot)

**3**


Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación  
• 製品の組み込み手順について • 操作手順 • 操作步驟

3-1




Push tray ejection button to eject the drive tray.

3-2




Remove the ABS support bracket by unscrewing 2 x M3\*4 flat head screws and keep the screws for drive mounting purposes (3-5).


3-3



3-4




3-5



Use the included M3\*4 screws to secure the bottom side of the drive onto the tray.


3-6



Insert the drive tray back into the MB111VP-B mobile rack, ensure the left end of the drive tray handle touches the silver anti-scratch shield, and then close the drive tray handle.

**4**

Device Installation • Installation eines Gerätes • Installation du dispositif  
• Instalación del dispositivo • デバイス取付手順 • 装置安裝步驟  
• 设备安装步驟

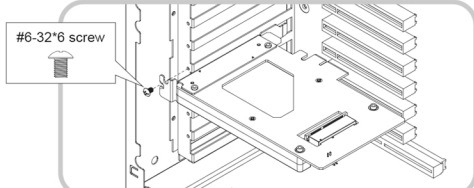

- 1. Fully insert the device's PCIe golden finger into the PCIe slot.
- 2. Use the included #6-32\*6 screw to secure the device.
- 3. (Optional) Connect the system's front panel LED cable to the 2-pin header for drive activity indications.

**U.2 & U.3 NVMe Hot-Plug Information:**

The MB111VP-B is designed to support NVMe hot-plug function when connected to a hot-plug-ready motherboard and system environment. However, if your system environment is not hot-plug-ready, you must turn off the system's power before pulling out the U.2 or U.3 SSD to avoid unexpected system errors.

